

RSD01 / RSD02

SYSTEM SOLUTIONS

AN INDIVIDUAL APPROACH

ON-LINE ORDERING

FLEXIBLE PRICING POLICY

Individual solution for you



RESIDENTIAL SECTIONAL DOORS

DOORHAN[®]



RSD01

TENSION SPRING MECHANISM

During development of RSD01 doors, all experience in production of DoorHan sectional doors have been applied. Most reliable mechanisms and only proven components are used in their construction. RSD01 doors differ from other doors by smoother operation, more rigid design and higher durability.



INSTALLATION REQUIREMENTS


- Opening width – from 2000 to 3500 mm
- Opening height – from 1800 to 2840 mm
- Minimum headroom without operator – 85 mm
- Minimum headroom with operator – 125 mm
- Minimum side space – 85 mm



RSD02

TORSION SPRING MECHANISM

RSD02 sectional doors are designed for larger openings with greater lintel height (distance from the top of the opening to the ceiling) and higher intensity use. These sectional doors are balanced by torsion springs which are adapted to heavier loads.

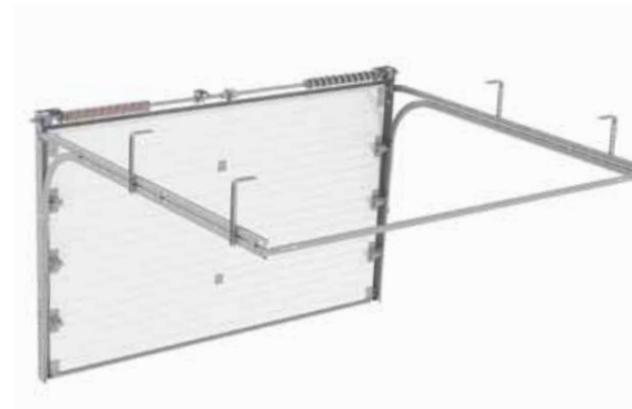

Lintel 150 /



Lintel 230 /

INSTALLATION REQUIREMENTS

- Opening width – from 1800 mm to 6000 mm
- Minimum side space – 100 mm
- Minimum headroom without operator – 150/230 mm
- Minimum headroom with operator – 150/230 mm
- Spring break safety mechanism.



PANORAMIC SECTIONAL DOORS

DOORHAN[®]

GLAZING

Glazed panels are made of special aluminum profiles, that provide the same stability as the standard steel and polyurethane door panels, and can be easily combined with standard panels. We offer doors with standard glazing, full glazing and combined glazing. Glazed panels can be used for RSD01 series, as well as for RSD02 series.



GLAZED PANELS

COMBINED GLAZING

For doors with vertical lifts and width from 4500 to 6000 mm, the width of glazed division without partition can be up to 900 mm. Standard glazed doors can be produced with pass doors with width from 600 to 1500 mm and height from 1100 to 2500 mm.

GLAZING TYPES AND DIMENSIONS OF GALZED SECTIONS

Height – from 370 to 750 mm

Width – up to 6000 mm



Panoramic panel with double glazing / plexiglass / polycarbonate



Panoramic panels with single glazing / polycarbonate



Panoramic panel with aluminum grille / Hole diameter – 6 mm.



WINDOWS

TYPES OF WINDOWS



Diameter 360 mm /



Dimensions 452 x 322 mm /



Dimensions 638 x 338 mm /



Dimensions 588 x 181 mm /





PASS DOORS

DOORHAN[®]

PASS DOORS

Residential sectional doors can be supplied with pass doors to ensure an additional entrance to the building without having to open the entire door. Double sealing system provides the door with great thermal insulation properties, retaining warmth in winter and cold in summer.

Pass doors feature:

- built-in closer,
- opening angle >90,
- standard frame colour – silver,
- built-in open pass door sensor,
- door retainer in open position.



V4 ST SERIES

PASS DOOR DIMENSIONS

Standard width – 900 mm

Standard height – 1800/1900/2000/2100 mm (depends on the panels height)

Step – 75 mm (without sealing)

Minimum distance between the pass door and the edge of door leaf – 500 mm



V5 ST SERIES

PASS DOOR DIMENSIONS

Standard width – 900 mm

Standard height – 1800/1900/2000/2100 mm (depends on the panels height)

Step – 25 mm (without sealing)

Minimum distance between the pass door and the edge of door leaf – 500 mm



SIDE ENTRANCE DOORS

DOORHAN[®]

SIDE ENTRANCE DOORS

Can be designed to match your garage door. Nothing simpler than that.
All in one design.



SIDE DOORS

SINGLE DOOR LEAF

Production: the doors are produced in standard designs, but also according to individual requirements.

Advantages: high structural strength; optimal price-quality ratio; simple and easy installation.

Design features: the door leaf is made of sandwich panels, the frames are made of aluminum profiles.

Design options: panel surface – Woodgrain, Stucco or Smooth.

Panel colors – standard. Frame color – RAL 9010.

On request, side doors are available in other colors, according to RAL chart.



Sectional door with side entrance door /

DIMENSIONS OF FULL GLAZED PANEL

Opening height from 1500 mm to 2500 mm

Opening width for single door leaf from 500 mm to 1500 mm

Width for one door leaf from 300 mm to 1300 mm

Door thickness including frame 45 mm



AUTOMATION SYSTEMS AND ACCESSORIES

DOORHAN[®]



OPERATORS

SECTIONAL OPERATORS

Thanks to the ceiling operators, the residential sectional doors open and close at the touch of a button on the remote control. Operators are also equipped with built-in lighting, which turns on automatically when the operator is activated.



ACCESSORIES

REMOTE CONTROLS, PHOTOCELLS, EXTERNAL RECEIVERS

Remote controls, photocells, external receivers, keyboards and other automation accessories, allow a convenient and a safe door operation. All control devices are optimized to connect with DoorHan automation systems, but they can also be combined with devices from other manufacturers. Remote controls are easy to program, within a few key presses, which saves time and provides a safe and easy operation of all automation systems.



Remote control /

MODEL	DIY-800KIT*	SECTIONAL-800	FAST-750	SECTIONAL-1200
Maximum power consumption (W)	150	150	150	300
Torque (N)	800	800	750	1 200
Door speed (m/s)	0,1	0,1	0,1-0,18	0,1
Maximum door area (m2)	11	11	10	16
Maximum opening height (mm)	2 600	2 800	2 800	3 800
Intensity (%)	50	50	50	50
Temperature range (°C)	from -20 to +55			
Degree of protection	IP20	IP20	IP20	IP20

* DIY-800KITCE includes one rail with belt PK-3300-3P and two remote controls.



Photocell-N / Photocells - transmitter, receiver, up to 40 m



LED lampa / Signal LED lamp




Lock Mini /



DESIGN OPTIONS AND ACCESSORIES

DOORHAN[®]

PANEL TYPES

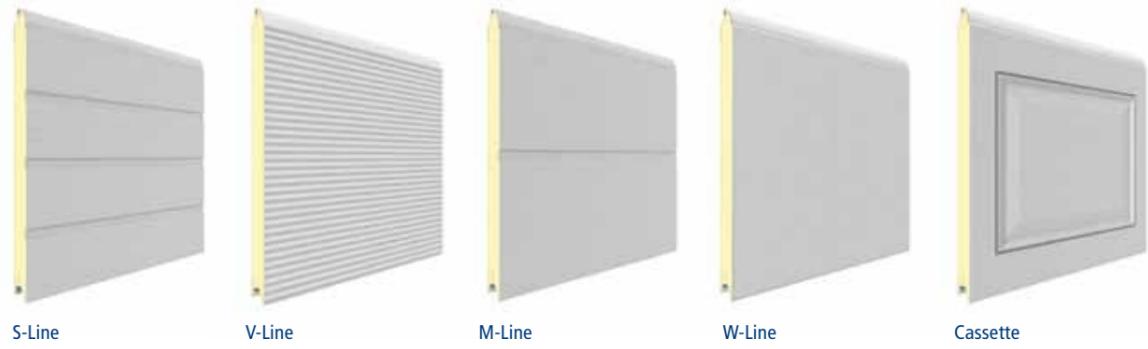

S-Line V-Line M-Line W-Line Cassette

SURFACE TYPES



Smooth Stucco Woodgrain

PVC



Winchester Golden oak Dark oak Mahogany Wenge Satin grey

STANDARD RAL COLORS



Panels can be painted in any colour from the international RAL Colour Chart. Colour swatches printed on this page may not accurately display the original colours. Please use the original RAL Colour Chart.

GLAZING TYPES




Panoramic panel with double glazing. plexiglass / polycarbonate

Panoramic panels with single glazing. polycarbonate

Panoramic panel with aluminum grille. Hole diameter – 6 mm.

WINDOWS

DoorHan sectional doors can be equipped with polycarbonate windows of various sizes and types. These windows represent an original design solution and door accessory.

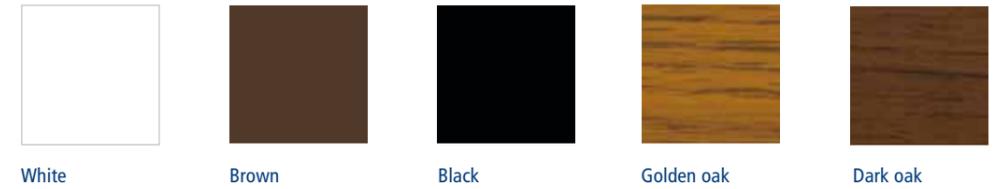

White Brown Black Golden oak Dark oak



Diameter 360 mm Dimensions 638 x 338 mm Dimensions 588 x 181 mm Dimensions 452 x 322 mm

HANDLES

DoorHan sectional doors can be equipped with special handles for manual opening of the doors.



Handle for RSD01, RSD02

LOCKS

Mechanical locks automatically block the door leaf after closing. Locks for RSD01 series and RSD02 series have a unique design and a robust construction.



Lock for RSD01, RSD02



DOORHAN[®]

Královský Vrch 2018

432 01 Kadaň

Česká republika

phone / +420 474 319 111

e-mail / kadan@doorhan.com

Contacts

www.doorhan.com

www.doorhan.com